




FIG. 1

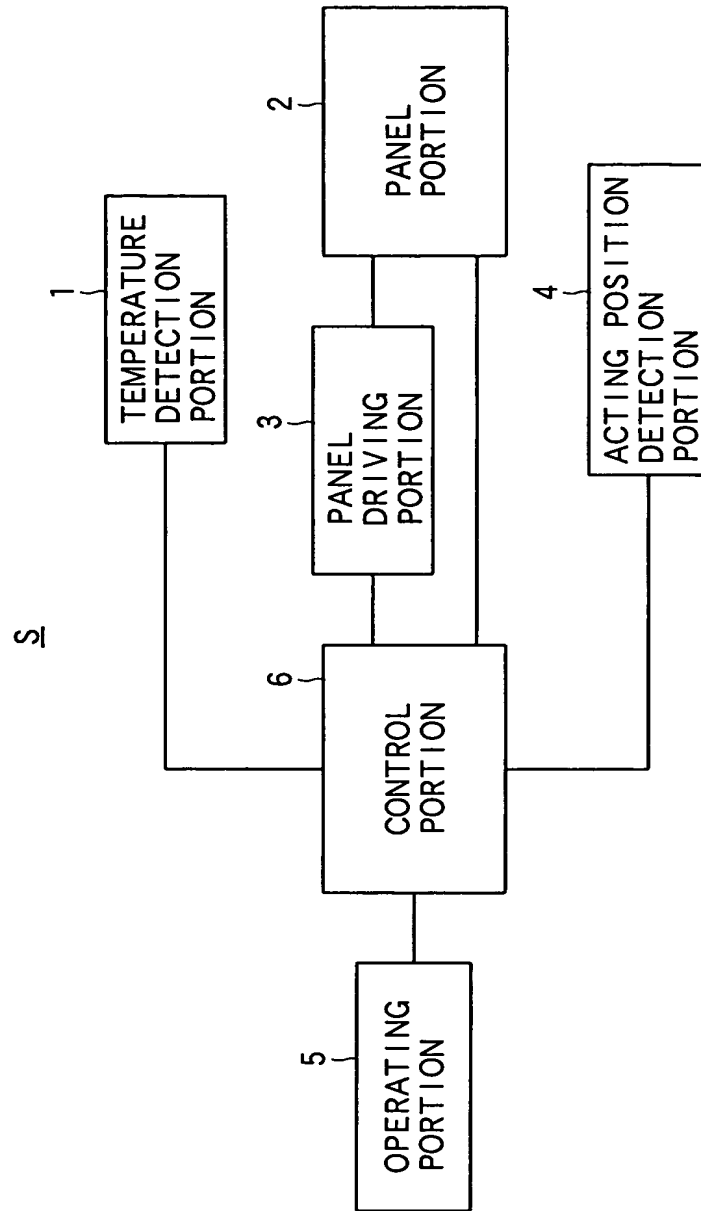


# FIG. 2A

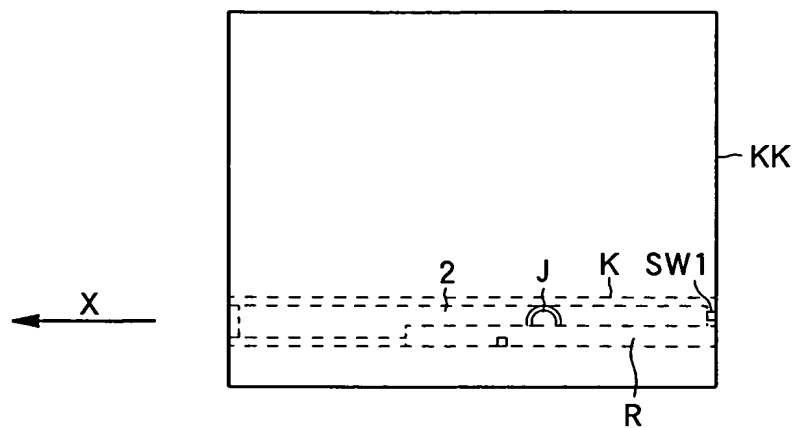

# FIG. 2B

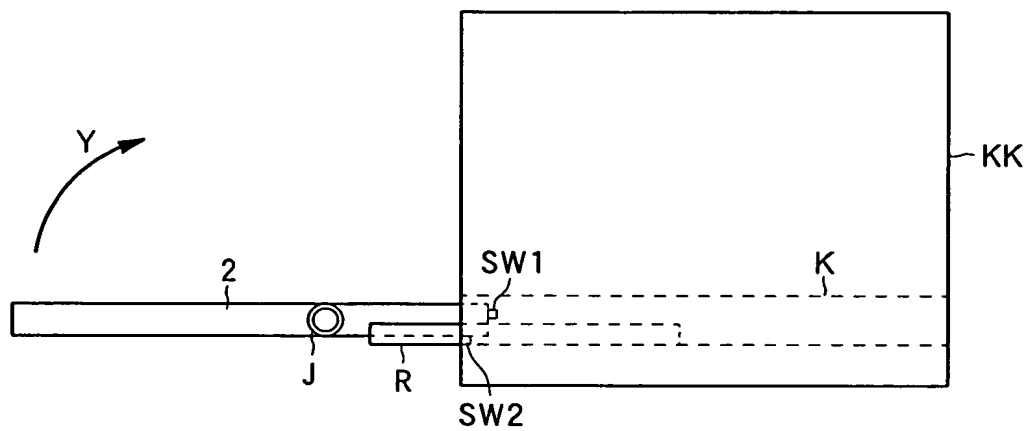

# FIG. 2C

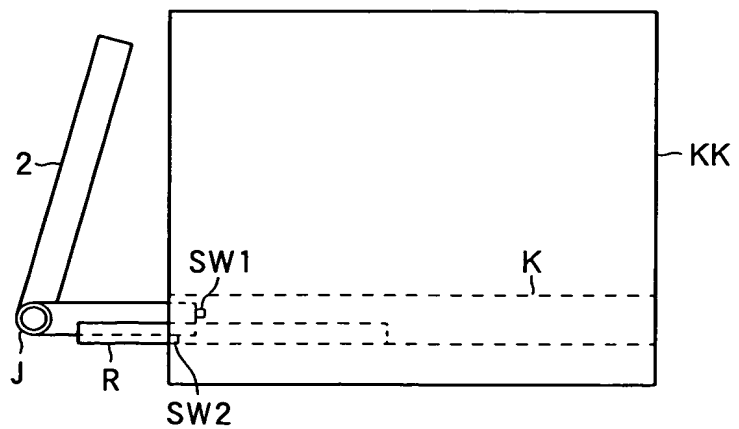

# FIG. 3

ACTION AMOUNT TABLE 60

TEMPERATURE RANGE	ACTION AMOUNT ERROR DETECTION VALUE	
	ACCOMMODATION POSITION TO INTERMEDIATE POSITION (FIRST ERROR DETECTION TIME)	INTERMEDIATE POSITION TO USE POSITION (SECOND ERROR DETECTION TIME)
UNDER -30° C	5 SEC.	5 SEC.
-30°C TO UNDER -10°C	3 SEC.	4 SEC.
-10°C TO UNDER 10°C	2 SEC.	3 SEC.
10°C TO UNDER 40°C	2 SEC.	2 SEC.
40°C AND HIGHER	2 SEC.	1 SEC.

# FIG. 4

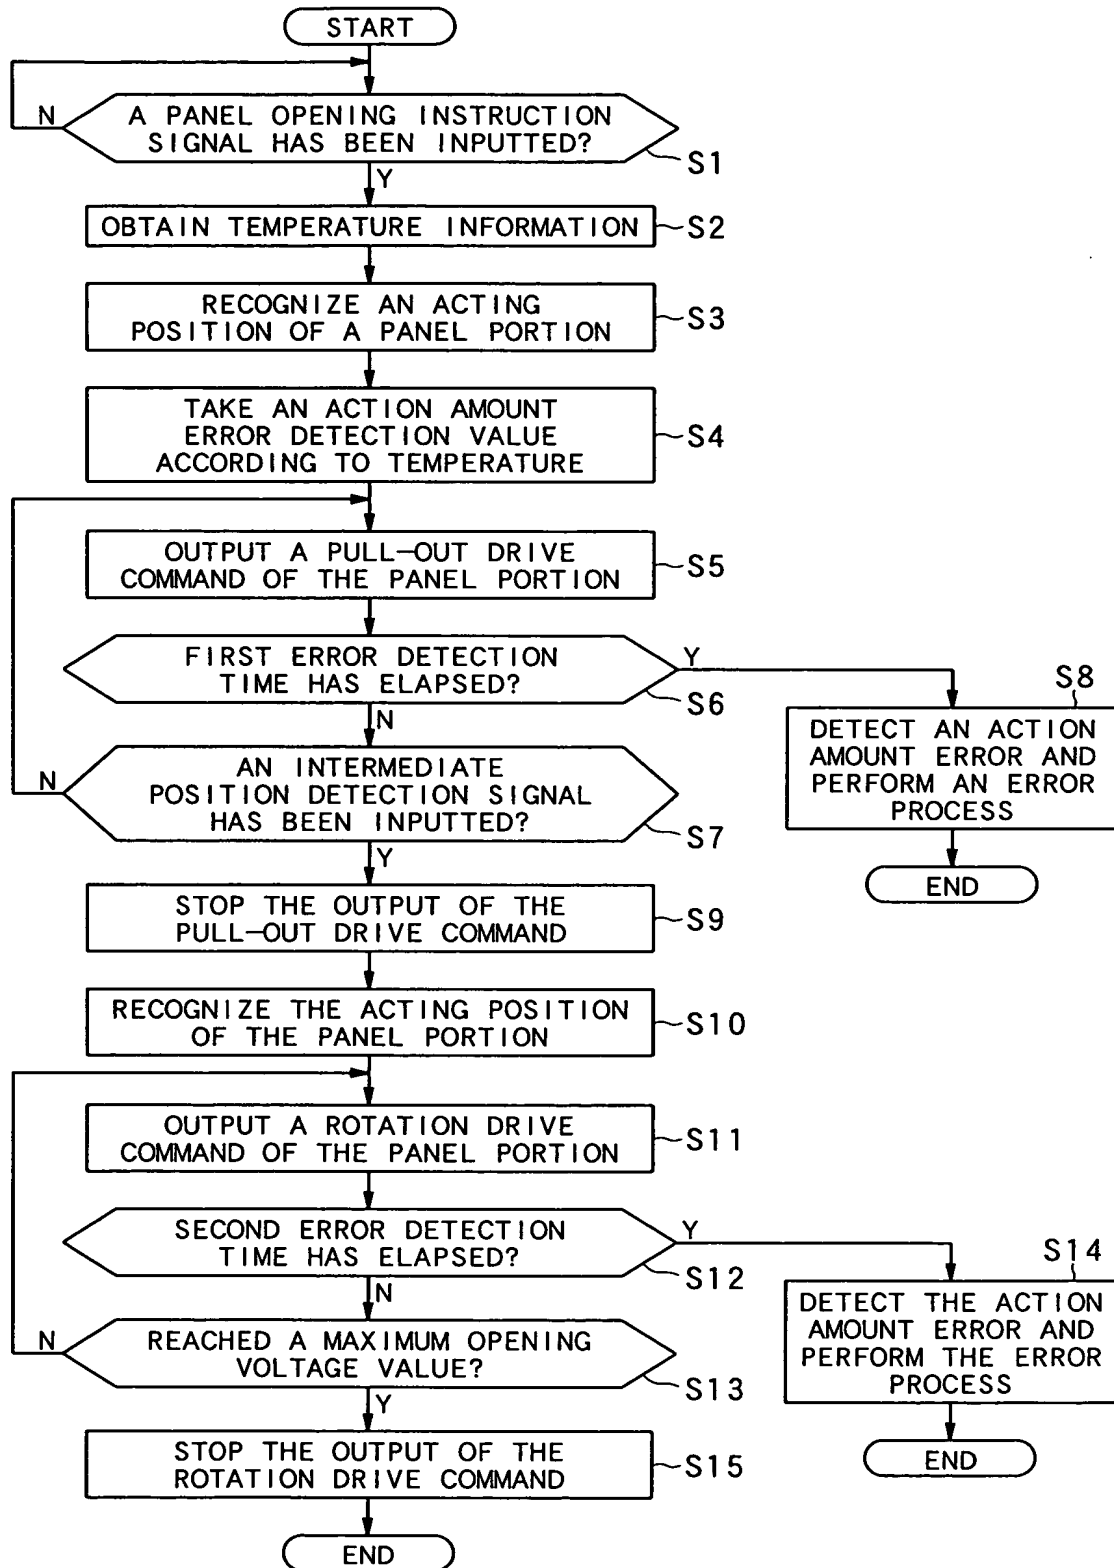


FIG. 5

